

## Exterior Colourless System

### AQUATOP 2600-66



#### **Colourless coating system now also for exterior**

Teknos has extended the topcoat range by a colourless topcoat which can be applied on outdoor surfaces – like wooden windows and doors, planned cladding etc. made of pine, spruce or larch wood.

#### **Long-time wood protection**

UV-light breaks down the lignin of the wood. The effect of UV light can lead to a photochemical reaction of the substance materials in most types of wood. This can result in bleaching, yellowing or even to the darkening of the wood surface. The new coating system from Teknos provides strong protection against UV radiation and minimises the yellowing of the wood.

#### **Maintain to keep beauty**

The formulation technology chosen allows Teknos to offer a colourless exterior coating solution

based upon today best knowledge. But to let the wood stay with its original and natural beauty timed maintenance is required. We cannot break the physical laws of UV-light or prevent discoloration of the wood, but we have extended the possibilities by intelligent formulation.

#### **EU regulations**

We comply with the rules according to the VOC Directive. We work continuously to ensure that our products comply with the REACH regulations.


#### **Give us a call**

A call to Teknos is a quick and easy way to get sound advice if you are considering using AQUATOP 2600-66 for exterior colourless surface coating systems.

Our technical support organisation are always ready to support you in designing your optimal coatings solution and application system.



▲ In comparison with similar coating systems available on the market the Teknos solution minimises the yellowing of the wood Exterior Colourless Systems with AQUATOP 2600-66 shown on the left) ▼






## Features and benefits

Features	Benefits
Layered coating solution where the product features of all three layers expand the durability of the treatment	Durable coating system* which protects exterior wood from decay and yellowing of the coating film
State-of-the-art formulation technology where each selected raw material add to the benefit of the high translucency	Colourless coating solution enhancing the natural look of the wood
Selected binder and blend of additives secures excellent flow	Perfectly smooth surface appearance in natural satin finish

\* Warranties to be set depending on exposure settings.

1.

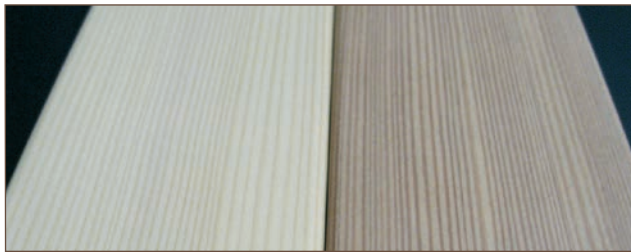

Satin look, system applied on Pine Wood (left) and Larch Wood (right).

2.



Colourless appearance highlights the natural look of the wood

## AQUATOP 2600-66

<b>Content</b>	Synthetic binder, special designed combination of UV-absorbers
<b>Packing</b>	3,10, 20, 120, 1000 l

## Recommended coating systems

	<b>Softwood / Hardwood 3-layers</b>
<b>Wood preservative*</b>	TEKNOL AQUA 1410 / TEKNOL AQUA 1412-01
<b>Intermediate</b>	AQUAFILLER 6500
<b>Topcoat</b>	AQUATOP 2600-66

\* Use biocides safely. Always read the label and product information before use.

**Teknos A/S**  
 Industrivej 19  
 DK-6580 VAMDRUP  
 Danmark  
 Tel. +45 76 93 94 00  
 salg@teknos.dk

**Teknos Oy**  
 Takkatie 3, P.O.Box 107  
 FI-00371 HELSINKI  
 Finland  
 Tel. +358 9 506 091  
 sales@teknos.fi

[www.teknos.com](http://www.teknos.com)