


TAPETTIPOHJJA- MAALI

WALLPAPER PRIMER

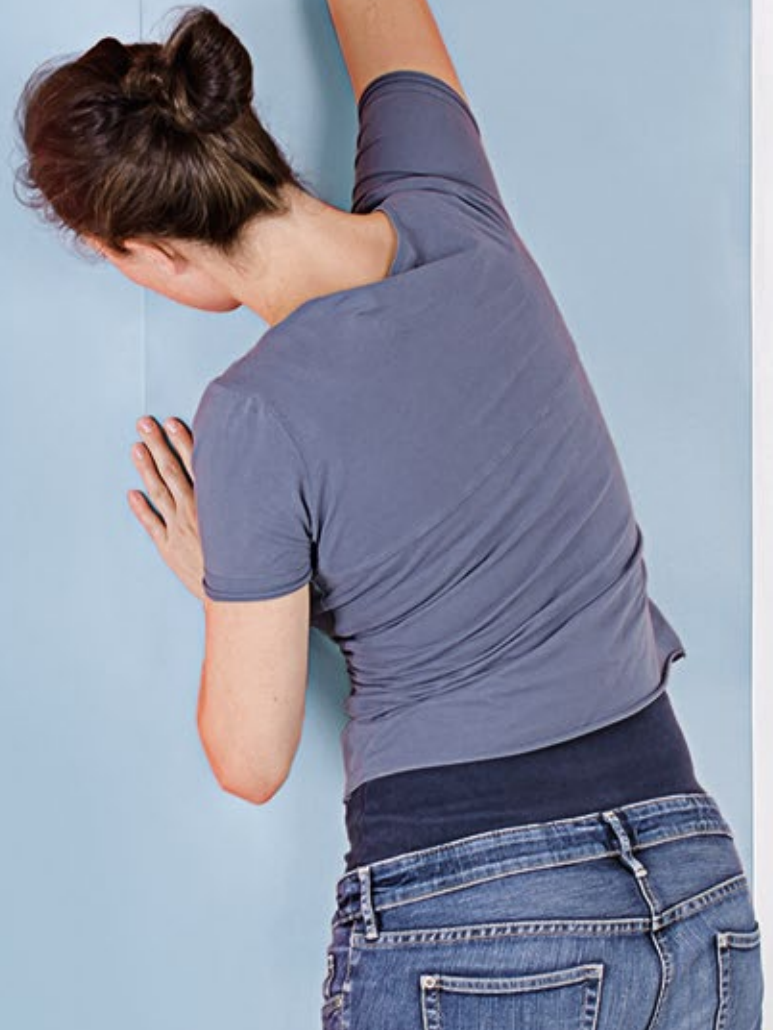

PRIMING OF WALLS TO BE PAPERED

EMISSION CLASS FOR BUILDING MATERIAL
M1

Ensure Successful Wallpapering

Wallpapering is easy and fluent when the surface to be wallpapered has been primed correctly. It is advisable to paint new building board and filler surfaces before wallpapering. An even painted surface improves the quality of wallpapering and ensures a successful end result.

A **wallpaper primer** also gives previously painted surfaces an even-coloured surface and a well-prepared surface for adhesives and pastes. In addition, removing the wallpaper in the future will be easier from a painted surface than an unpainted surface.

NEW!



TAPETTIPOHJAMAALI Wallpaper Primer

A waterborne, moisture-resistant acrylate dispersion paint for priming walls that will be papered. Suitable for building board and filler surfaces in dry indoor spaces. Can also be used for priming wall surfaces to be painted and for attaching and priming fibreglass wall coverings. Offers a well-prepared surface for the most commonly used adhesives and pastes.



Paint product group: 212 (MaalausRYL 2012). Gloss level/group: 6, full matte. **Spreading capacity:** Filler and building board surface 6 m²/l, previously painted surface 8 m²/litre. Application method: Applied by roller, spray or brush. A painted surface can be wallpapered on the following day. **Tint:** White, can be tinted into light shades displayed on the Teknos Interior Colour Chart. **Package sizes:** 2,7 l, 9 l. Emission classification group M1.