


TEKNOPOX REPAIR 3296 RAPID



- Fast-curing repair-kit for coating damages
- Can be used on all Teknos flow coats
- Very fast drying at room temperature
- Pipes can be repaired and handled within 3 h without extra heating equipment
- Easy to apply using pre-filled double cartridges
- Allows to use the repair-kit in the field at sub-zero conditions
- No blushing or exudation even at adverse conditions



FASTER DRYING TIME WITH TEKNOPOX REPAIR 3296 RAPID

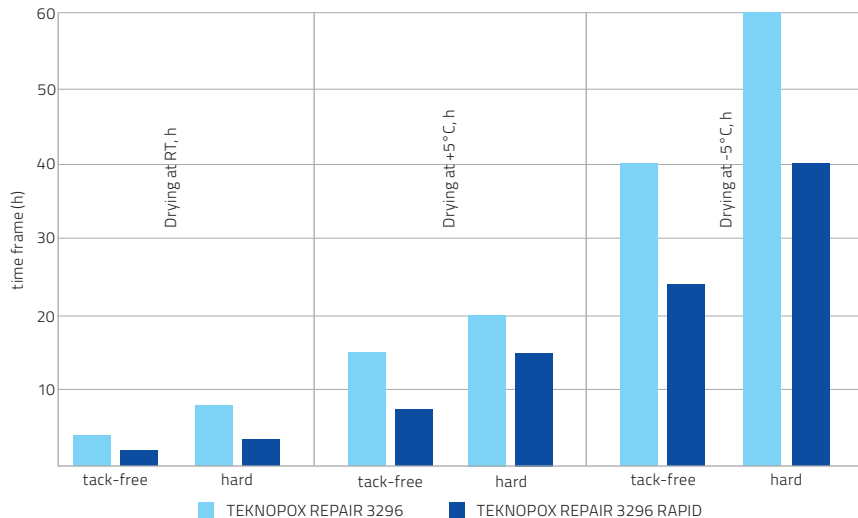

TEKNOPOX REPAIR 3296 RAPID enables you to repair professionally damages on the surface in a few steps.

The repair set consists of

- double cartridge TEKNOPOX REPAIR 3296 RAPID
- static mixer
- dispenser

Needed work material

- adhesive film
- putty knife

- Step 1** Install the double cartridge in the dispenser. The static mixer should be fixed to the double cartridge.
- Step 2** Mask the repair area with adhesive film.
- Step 3** Afterwards grind the repair area and degrease with TEKNOSOLV 6720.
- Step 4** Apply TEKNOPOX REPAIR 3296 RAPID on the repair area and distribute it uniformly with a putty knife.
- Step 5** Finally remove the adhesive film.

The repair area is dust dry after two hours and touch dry after 3 hours. The double cartridge should be tightly closed and can be used several times.

